



NOTES

- 1. Type 10 posts shall be 6x8 timber or W6x9.
 Type 11 posts shall be 10x10 timber or W6x15.
 For details, see Standard Plan "Beam Guardrail Posts and Blocks."
- 2. Type 10 guardrail post spacing shall be 6'- 3" on center. Type 11 shall be a maximum of 3'- $1\frac{1}{2}$ " on center.

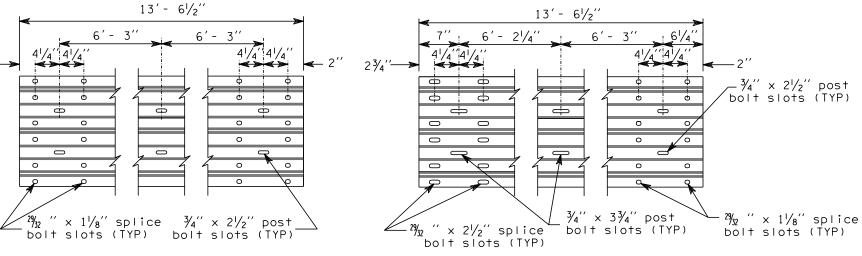


THRIE BEAM RAIL ELEMENT

THRIE BEAM EXPANSION SECTION

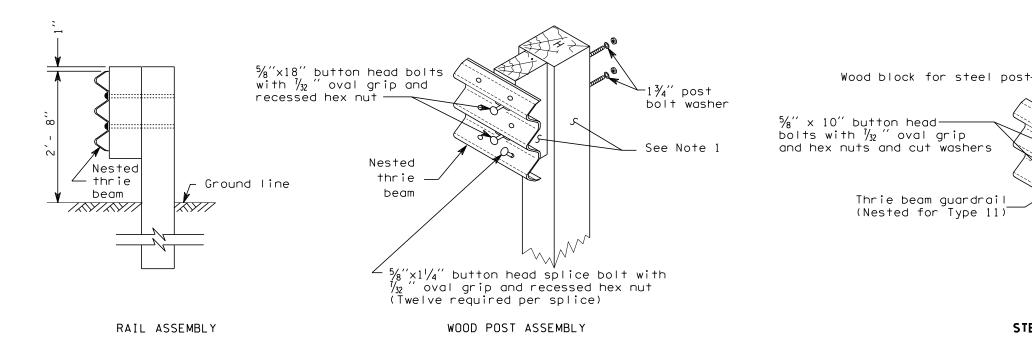

TYPE 10 and 11

STEEL POST ASSEMBLY



NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE.
THE ORIGINAL, SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION, IS KEPT ON FILE
AT THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION. A COPY MAY BE OBTAINED
UPON REQUEST.

7/98 Add steel post assembly detail

RBA
DATE

REVISION

APPROVED FOR PUBLICATION

Clifford E. Mansfield

PEPUTY STATE DESIGN ENGINEER

DATE
WASHINGTON STATE DEPARTMENT OF TRANSPORTATION
OLYMPIA, WASHINGTON

TYPE 11